

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau




(43) International Publication Date
5 August 2004 (05.08.2004)

PCT

(10) International Publication Number
WO 2004/065887 A1

- (51) International Patent Classification⁷: **F41J 1/12**
- (21) International Application Number:
PCT/SE2003/002096
- (22) International Filing Date:
29 December 2003 (29.12.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
60/319,882 20 January 2003 (20.01.2003) US
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- (71) Applicant and
(72) Inventor: **MOBERG, Gerth** [SE/SE]; PO Box Helgenas, S-590 98 Edsbruk (SE).
- (74) Agents: **FASTH, Rolf** et al.; Fasth Law Offices, 629 E. Boca Raton Road, Phoenix, AZ 85022 (US).
- Published:
— with international search report
— with amended claims
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

(54) Title: APPARATUS FOR SHOOTING RANGES

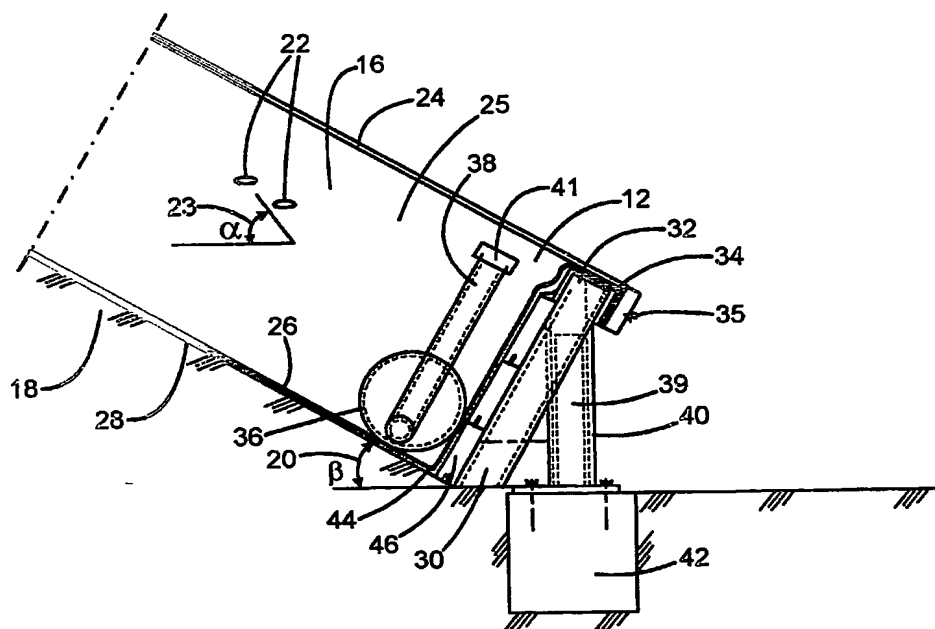

(57) Abstract: The apparatus is for installation at shooting ranges and has a housing 12 that has a resilient top layer 24 and a flexible bottom layer 26. The layer 26 extends along an inclined bottom surface 28 and over an upwardly protruding support member 30 to a front side 34. The top layer 24 is attached to the layer 26 at the front side 34 to form a container 25. A non-flowable granulate material 16 is packed in the container 25. The inclined bottom surface 28 is inclined at an angle 20 relative to a horizontal plane 21. The angle 20 is less than an angle of repose 23 of the granulated material 16.